

DWL to:

Base of mast 1070 mm
 Top face of main boom 1400 mm
 C/line gunter jaws 4570 mm
 U/side hounds band 4860 mm
 U/side masthead band 5920 mm

Mainsail:

Area 9.570 m²

Head 2960 mm
 Luff 3155 mm
 Leech 6670 mm
 Foot 2290 mm

Roach 120 mm
 Throat knock 60 mm
 Clew knock 30 mm

Diagonal 4355 mm
 LP 2170 mm
 Leech LP 1480 mm

Mainsail is laced to boom and marlin hitched to yard. Can be laced to mast or set on hoops.





Mainsail to have two or three battens at sailmaker's advice.

Staysail:

Area 2.322 m²
 Luff 3805 mm
 Leech 3370 mm
 Foot 1390 mm
 LP 1220 mm

Genoa:

Area 5.329 m²
 Luff 5250 mm
 Leech 4300 mm
 Foot 2500 mm
 LP 2030 mm

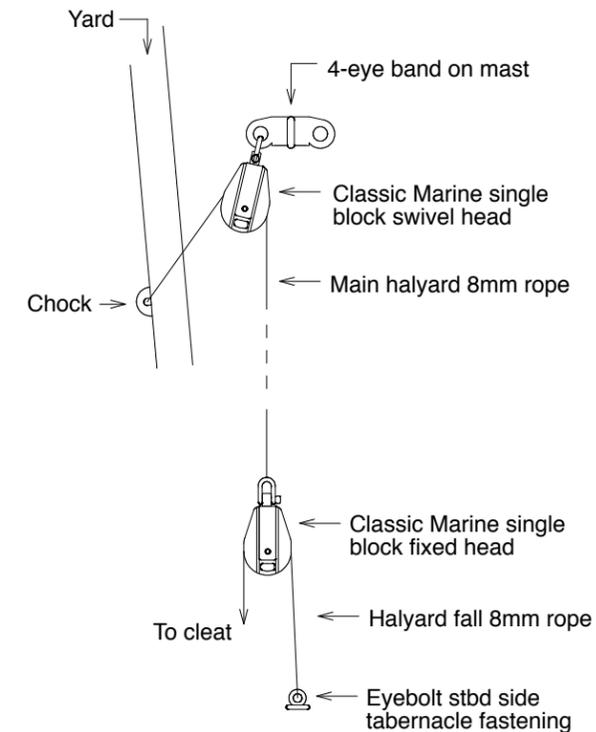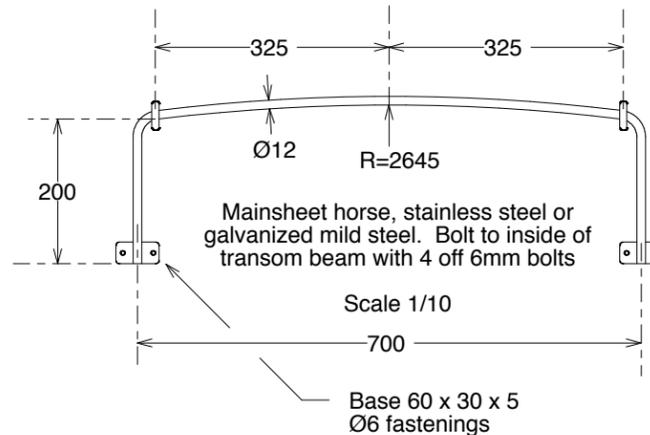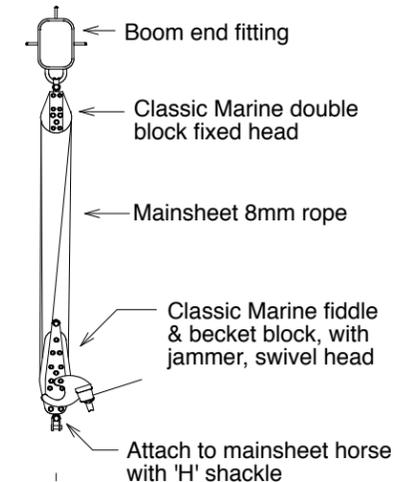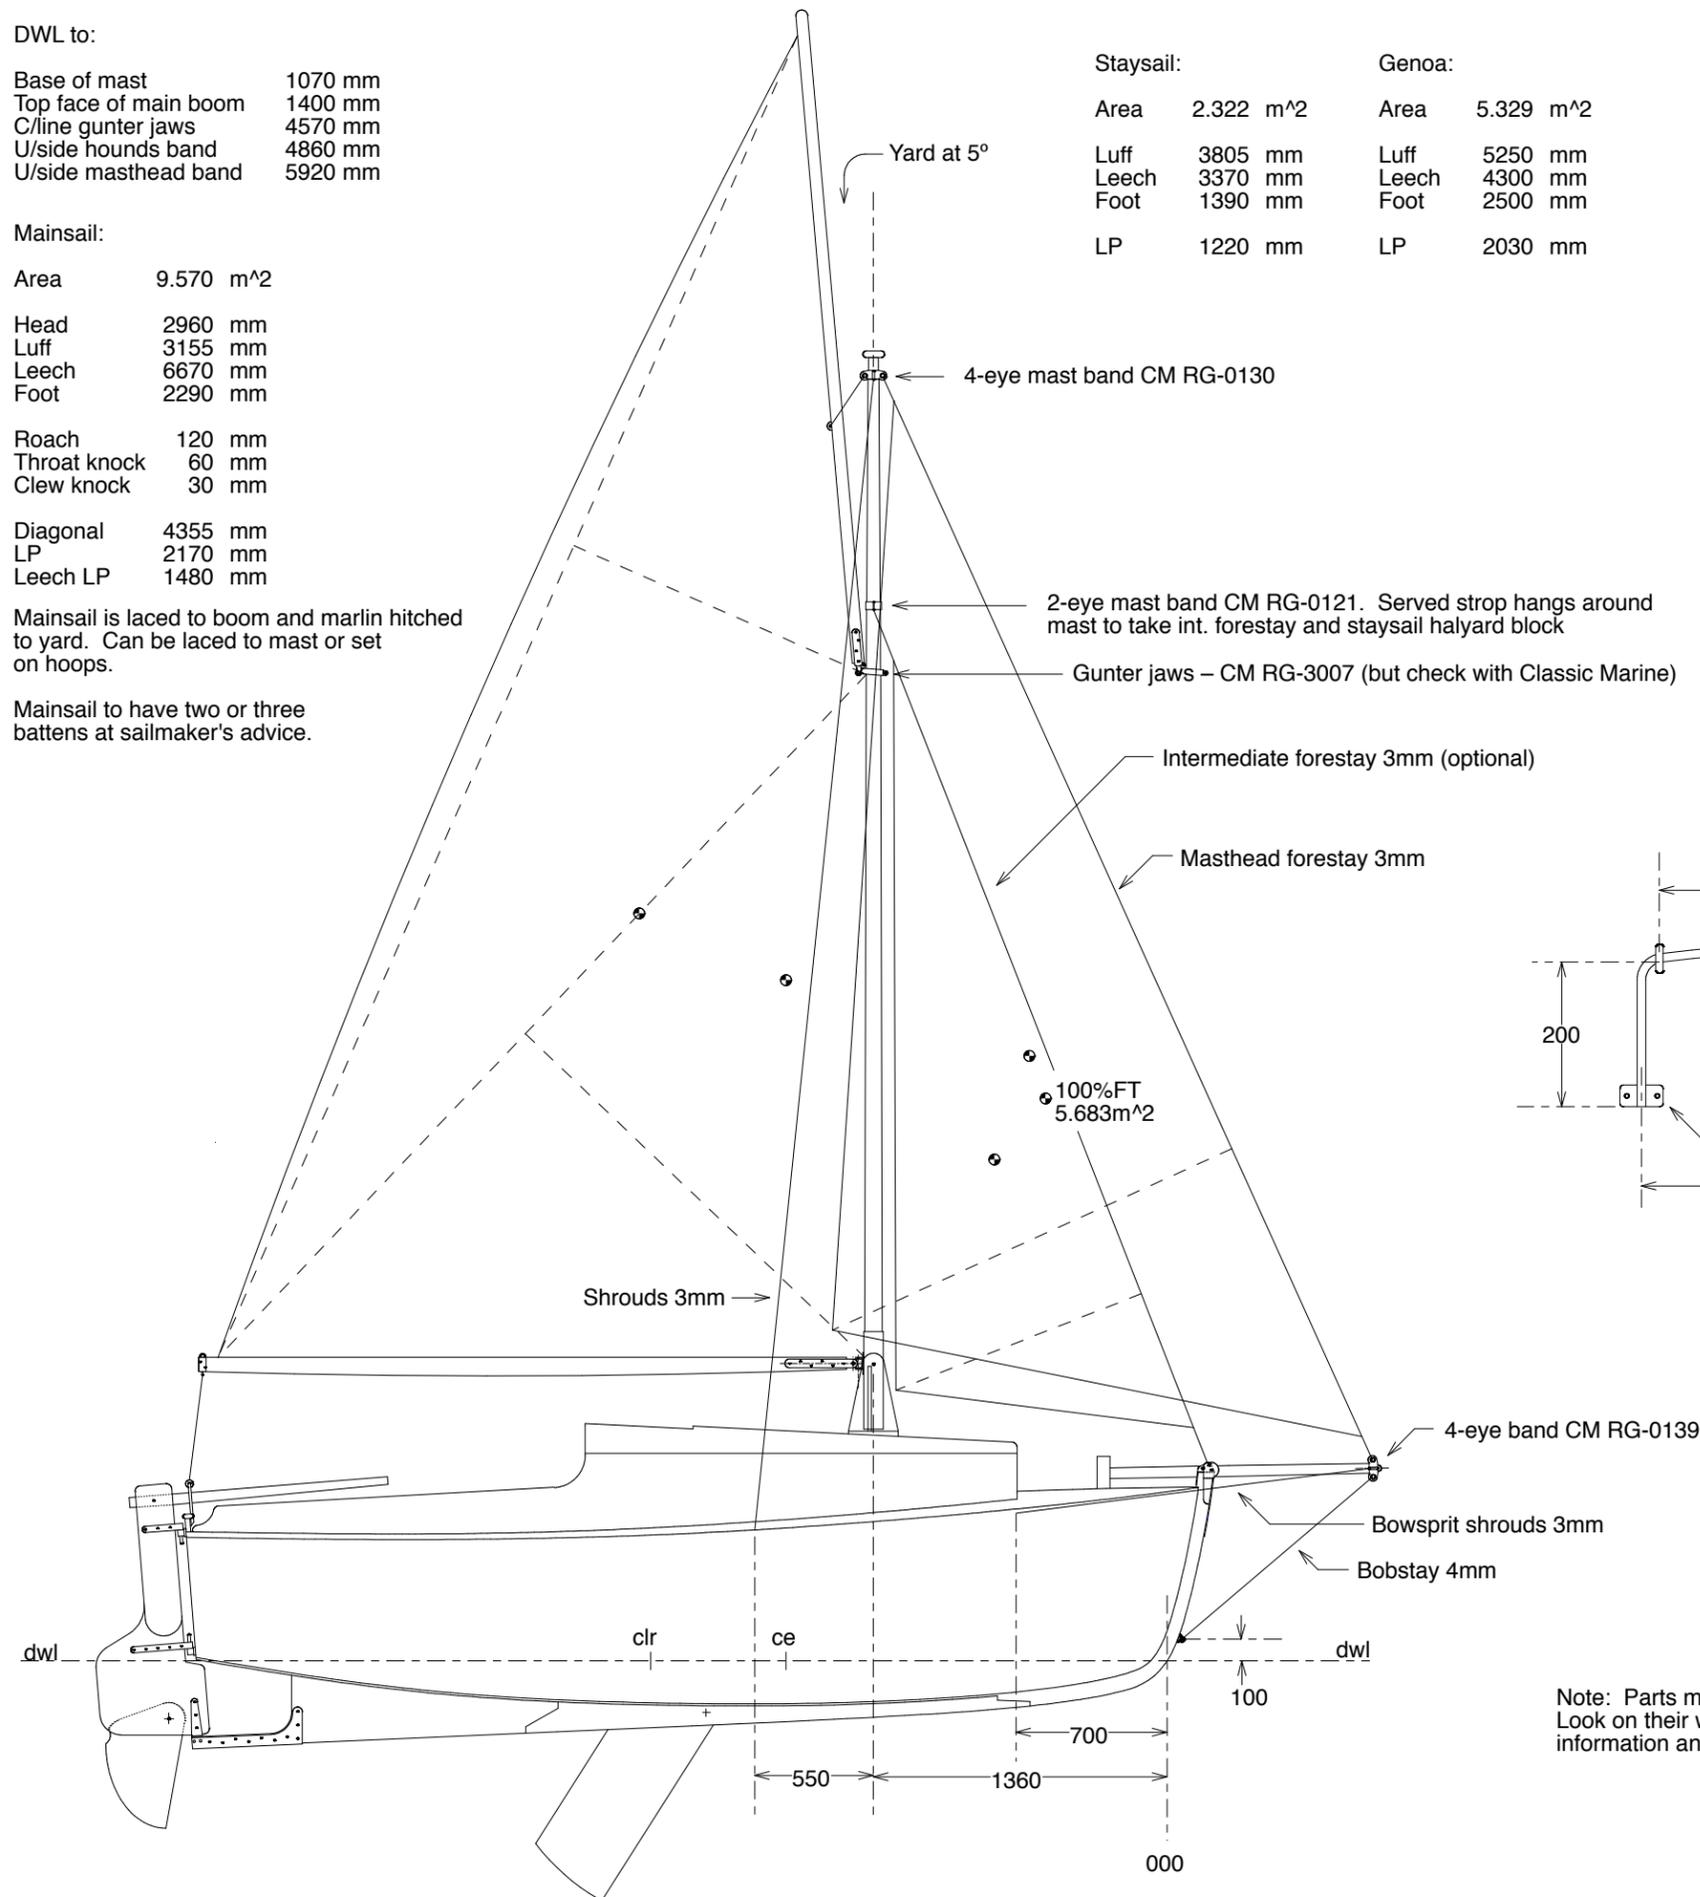

Genoa halyard is 8mm rope, with block hung from masthead eye-band. If wished a single whip fall can be used (as for main halyard).

Staysail halyard is 8mm rope, with block hung in strop from hounds eyeband

If the genoa is set on a Wykeham-Marting furl gear, the genoa luff wire MUST NOT replace the masthead forestay.

Shroudplates are CM HL-0406
 Bowsprit shroudplates are CM HL-0420

Shrouds and stays can be 7 x 7 or 1 x 19 construction wire rope, galvanized or stainless steel, set up on rigging screws or lanyards.

If lanyards use minimum 6 turns of 3mm terylene rope.

Note: Parts marked "CM" are from Classic Marine. Look on their website www.classicmarine.co.uk for more information and to check Part Nos. etc.

 Whisstock boats and boat plans	support@whisstock.com	
	Design 077 Sail Plan Gunter Rig Cutter	Scale 1/33.33 & 1/10 Date 03 Nov 2012 Plan No. 077/011/20 Issue No. web 01
© Debenriver Ltd 2012. All Rights Reserved		All dimensions in millimetres unless otherwise noted