


Boat 123 Sail Plan	Scale 1/25
	Date 18/07/2007
	Plan No. 123/011/01
	Issue No. 02 web
All dimensions in millimetres unless noted otherwise	

Mizzen Head & foot pulled out with lanyards to peak & clew. Head marline hitched to yard & foot laced to boom.

Mainsail Head & foot pulled out with lanyards to peak & clew. Head marline hitched to gaff & foot laced to boom. Luff lacing to mainmast (not hoops). Knock back of tack pin and reef hooks should be about 40mm aft of aft face of mast.

Staysail Wire luff to set on Wykeham-Martin furl gear Size 2. Sail sets abaft forestay.

Yankee Jib Wire luff to set on Wykeham-Martin furl gear Size 2. Sail luff is used directly in place of jibstay so should be minimum Ø4 7 x 19 stainless steel wire rope.

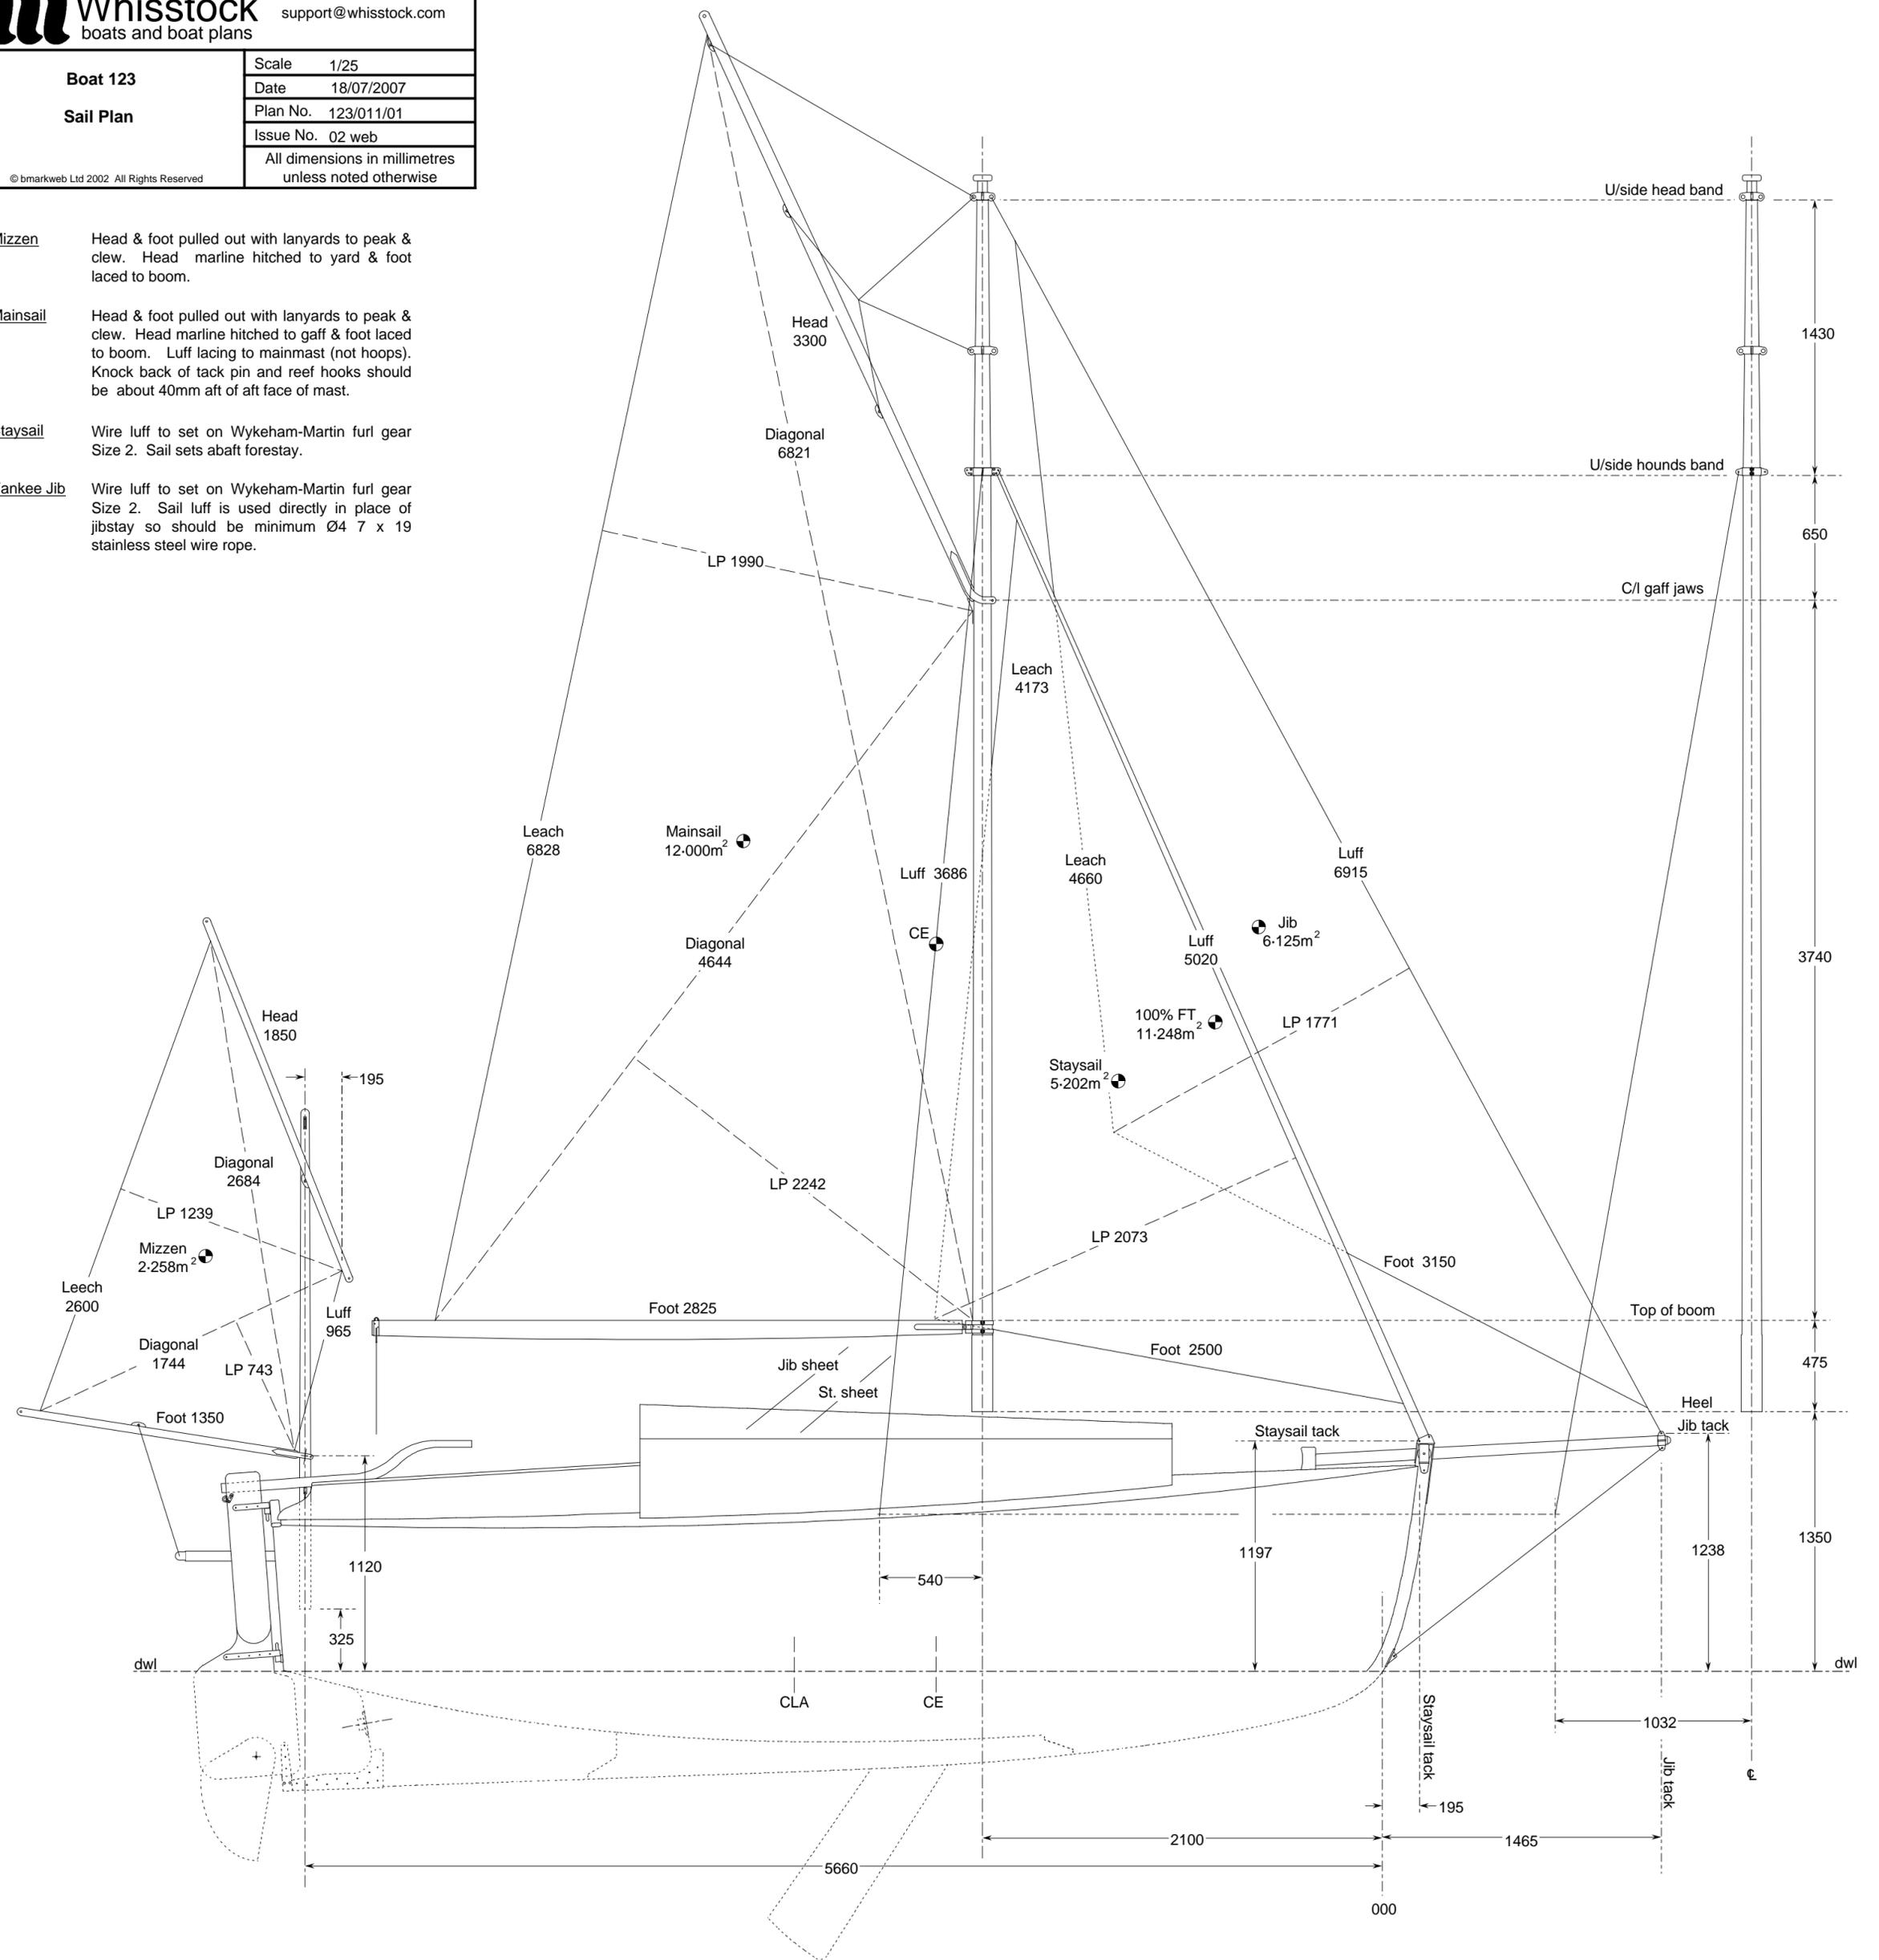

U/side head band 1430

U/side hounds band 650

C/l gaff jaws 3740

Top of boom 475

Heel 1350

Jib tack 1238

Jib tack 1032

Jib tack 195

1465

000

Head 1850

195

Diagonal 2684

LP 1239

Mizzen 2.258m²

Leech 2600

Diagonal 1744

LP 743

Foot 1350

1120

325

dwl

Head 3300

Diagonal 6821

LP 1990

Leach 6828

Mainsail 12.000m²

Diagonal 4644

LP 2242

Foot 2825

Jib sheet

St. sheet

540

CE

Luff 3686

Leach 4173

Leach 4660

Luff 5020

Jib 6.125m²

100% FT 11.248m²

Staysail 5.202m²

LP 1771

LP 2073

Foot 3150

Foot 2500

1197

5660

2100

1465

000

Staysail tack

1197

1238

1350

1032

Jib tack

195

1465

000