
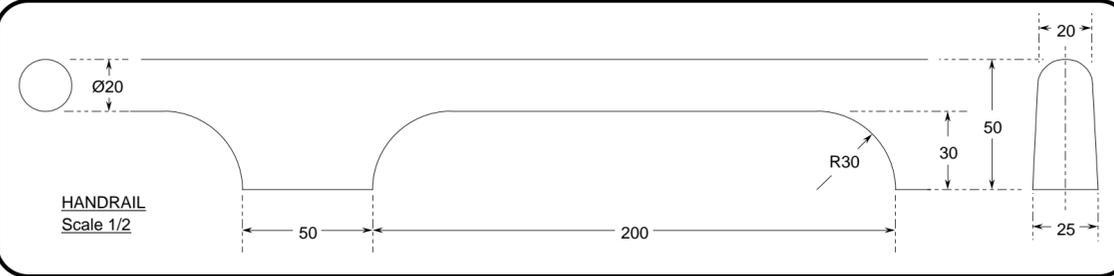
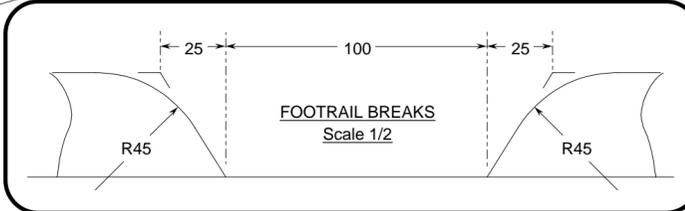
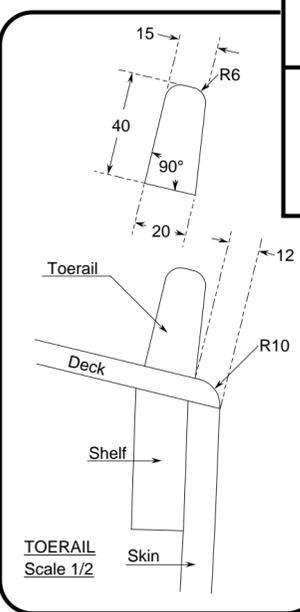


Boat 123 Deck Plan	Scale	1/10 & 1/2
	Date	30/01/2002
	Plan No.	123/012/01
	Issue No.	01 web version
All dimensions in millimetres unless noted otherwise		

- Notes:**
- "CM" indicates items manufactured/supplied by Classic Marine.
 - Positions of jib & staysail sheet leads should be ascertained on sail trials - positions shown are for guidance only.

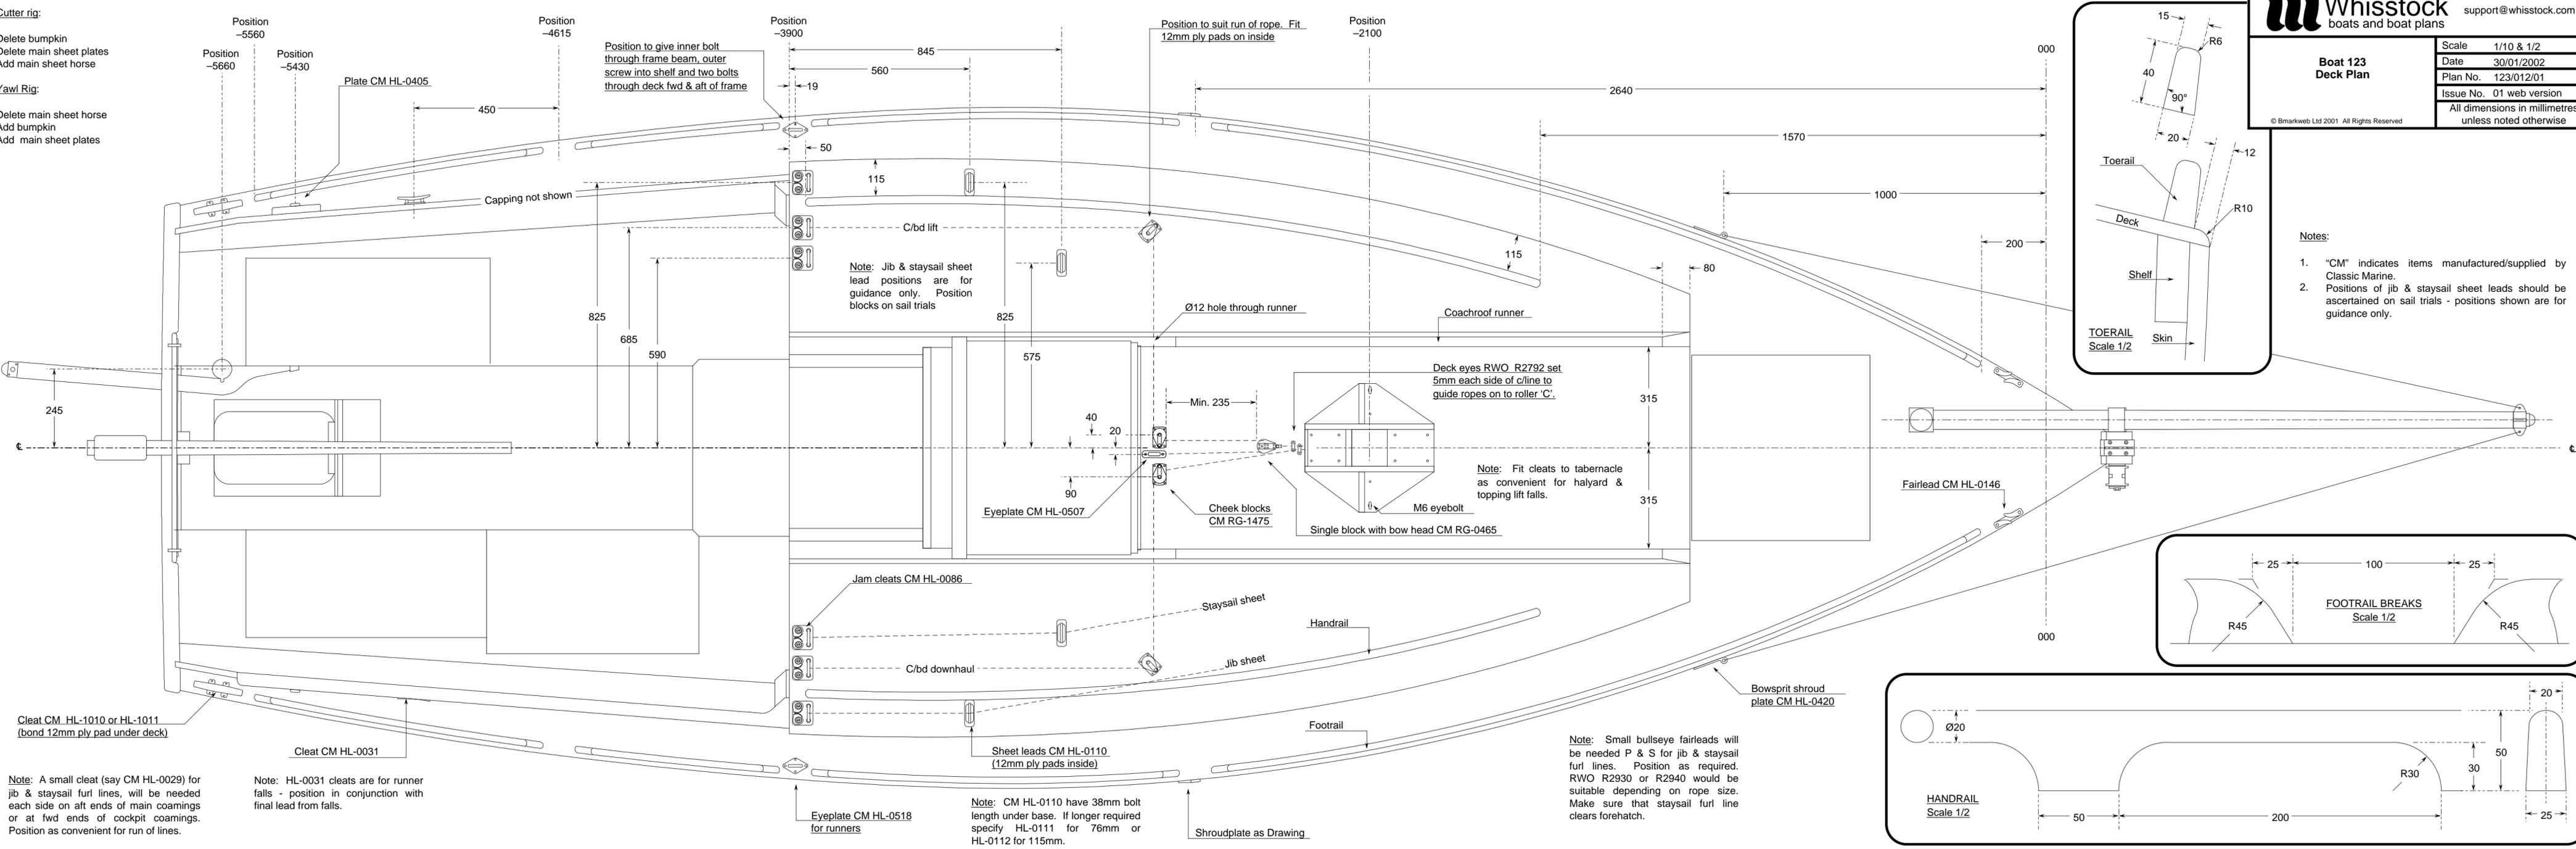

Cutter rig:
Delete bumpkin
Delete main sheet plates
Add main sheet horse

Yawl Rig:
Delete main sheet horse
Add bumpkin
Add main sheet plates

Note: A small cleat (say CM HL-0029) for jib & staysail furl lines, will be needed each side on aft ends of main coamings or at fwd ends of cockpit coamings. Position as convenient for run of lines.

Note: HL-0031 cleats are for runner falls - position in conjunction with final lead from falls.

Note: CM HL-0110 have 38mm bolt length under base. If longer required specify HL-0111 for 76mm or HL-0112 for 115mm.

Note: Small bullseye fairleads will be needed P & S for jib & staysail furl lines. Position as required. RWO R2930 or R2940 would be suitable depending on rope size. Make sure that staysail furl line clears forehatch.

Position to give inner bolt through frame beam, outer screw into shelf and two bolts through deck fwd & aft of frame

Note: Jib & staysail sheet lead positions are for guidance only. Position blocks on sail trials

Deck eyes RWO R2792 set 5mm each side of c/line to guide ropes on to roller 'C'.

Note: Fit cleats to tabernacle as convenient for halyard & topping lift falls.

Cleat CM HL-1010 or HL-1011 (bond 12mm ply pad under deck)

Cleat CM HL-0031

Eyeplate CM HL-0518 for runners

Sheet leads CM HL-0110 (12mm ply pads inside)

Shroudplate as Drawing

Bowsprit shroud plate CM HL-0420

Fairlead CM HL-0146

Jam cleats CM HL-0086

Staysail sheet

Handrail

Jib sheet

Footrail

Plate CM HL-0405

Capping not shown

C/bd lift

Ø12 hole through runner

Coachroof runner

Cheek blocks CM RG-1475

Single block with bow head CM RG-0465

Eyeplate CM HL-0507

90

40

20

Min. 235

825

575

685

590

825

115

50

19

Position -3900

Position -4615

Position -5560

Position -5660

Position -5430

Position -2100

Position to suit run of rope. Fit 12mm ply pads on inside

2640

1570

1000

200

80

315

315

000

000